



Aeration  
Industries®

# Aire-O<sub>2</sub> Microfloat® DAF

## Dispersed Air Flotation

### Float FOG a Better Way!

Ideal for industrial applications, our Aire-O<sub>2</sub> Microfloat® Dispersed Air Flotation System is an effective, affordable, and reliable physical/chemical pre-treatment technology with average removal efficiencies of 90% Fat, Oil and Grease (FOG), 60% Total Suspended Solids (TSS), and 30% Biochemical Oxygen Demand (BOD). Installed and operational costs are typically much lower than traditional Dissolved Air Flotation systems because there is less mechanical equipment.

The Aire-O<sub>2</sub> Microfloat® unit has a specially designed non-clog spinning propeller disc that creates extremely fine micro bubbles (10-50 microns in diameter). Oil particles and suspended solids in the wastewater readily attach to the bubbles as they rise to the surface. The small bubble size results in very high removal efficiencies. Many applications do not require any chemical addition for superior treatment.

The Microfloat is manufactured by Aeration Industries International, a recognized global leader in wastewater treatment. The Company has installations throughout the United States and more than 92 countries around the world.

### Aire-O<sub>2</sub> Microfloat® Benefits:

- Greatly reduces surcharges paid by industries discharging to local municipalities for disposal.
- Reduces maintenance and energy consumption.
- Requires no balancing of flow rates.
- Eliminates recycle pumps, compressors and attendant piping.
- Small bubble size can help to reduce chemical consumption.
- Complete standard circular systems and custom DAF retrofits available.

**Applications:** food preparation, tank & truck washing facilities, slaughterhouse operations, vegetable oil processing, meat & poultry processing, milk & dairy processing, petrochemical processing, and paper industry.



*Retrofits are quick and easy to existing tankage.*


# Aire-O<sub>2</sub> Microfloat® DAF Dispersed Air Flotation

## Microfloat Standard System Sizing



Microfloat Size	Flow Capacity		
Diameter	Height	Gallons/min	Liters/min
9'-0" (2.74 m)	8'-6" (2.59 m)	95	360
10'-0" (3.05 m)	10'-0" (3.05 m)	118	447
12'-0" (3.66 m)	10'-0" (3.05 m)	170	644
14'-0" (4.27 m)*	10'-0" (3.05 m)	231	874
16'-0" (4.88 m)*	10'-0" (3.05 m)	302	1,143
20'-0" (6.10 m)**	12'-0" (3.66 m)	471	1,783

\* Use two (2) Microfloat aerators.

\*\* Use four (4) Microfloat aerators.

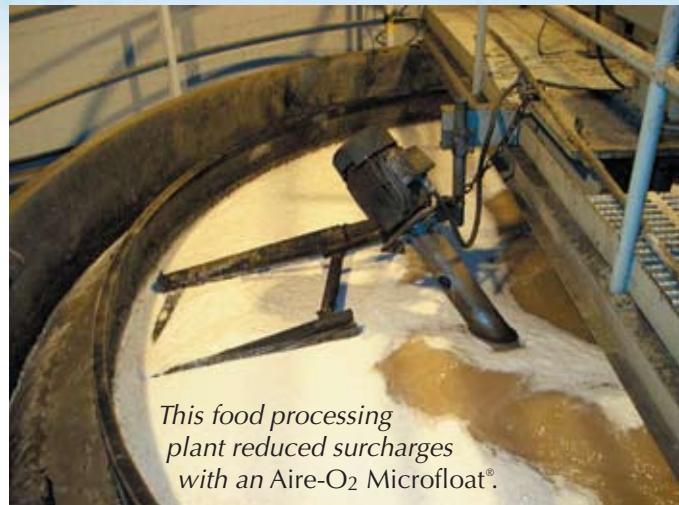

## Process Diagram

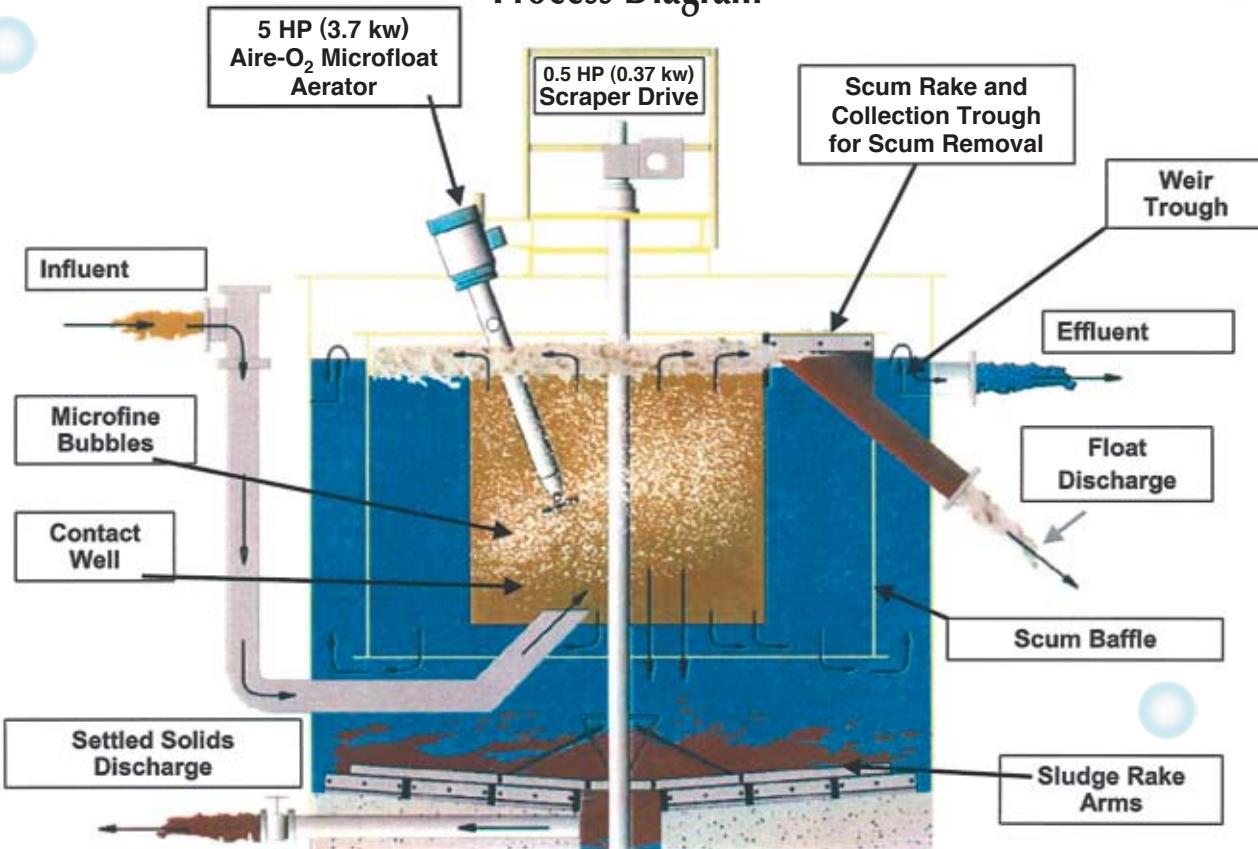

Aeration  
Industries®

Aeration Industries International, Inc.  
Mail To: P.O. Box 59144 • Minneapolis, MN 55459-0144 USA  
Ship To: 4100 Peavey Road • Chaska, MN 55318-2353 USA  
+1-952-448-6789 / 1-800-328-8287 (USA) / FAX +1-952-448-7293  
[www.aireo2.com](http://www.aireo2.com)